

# HC2065P BOLLARD RANGE



## HC2065P Bollard Product Specifications:

- Stainless steel bollard with cast stainless steel cap.
- 316 grade stainless steel.
- Pipe is 114mm dia with a 4mm thickness (extremely robust) with 30mm high cap.
- 900mm overground level and 300mm underground level.
- Powder coated with polished cap, as we manufacture all our products in house we can arrange any colour combination you require.
- Fixed and removable versions with retention socket available.

**Fitting:** Fixed bollard is fixed underground level in concrete, removable bollard comes complete with retention socket.

## Concrete Foundations:


*Fixed Bollard:* 500 x 500 x 300mm.  
*Removable Bollard:* 500 x 500 x 300mm (hardcore for drainage is recommended under the socket before the concrete).

## Options Available:

- Range of sockets available.
- Reflective tape.
- Ram Raid.
- Other lengths available on request.
- Matches HC2091 cycle stand.

## Specifications:


Pipe (Dia)	114 mm
Wall Thickness	4 mm
Overground	900 mm
Underground	300 mm

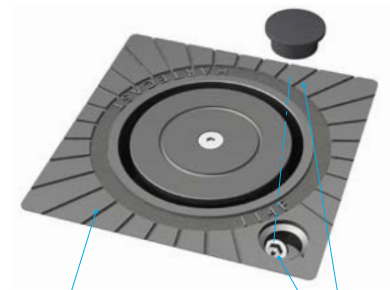

HC114F Ductile Iron Retention Socket



HC114R Stainless Steel Retention Socket

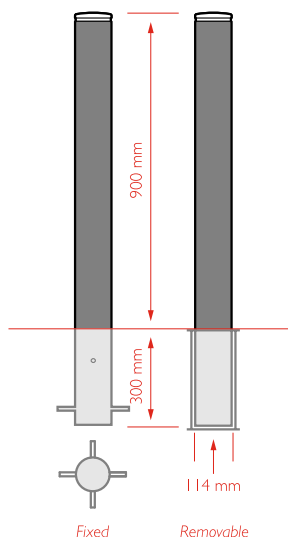

HC2065P Bollard (Powder Coat Finish)

# HC2065 BOLLARD RANGE

## BOLLARD RANGE



### HC2065 Bollard Product Specifications:

- Stainless steel bollard with cap.
- 316 grade stainless steel.
- Pipe is 114mm dia with a 3mm thickness.
- 900mm overground level and 300mm underground level.
- Brushed finish with polished cap.
- Fixed and removable versions with retention socket available.

**Fitting:** Fixed bollard is fixed underground level in concrete, removable bollard comes with retention socket.

### Concrete Foundations:

*Fixed Bollard:* 500 x 500 x 300mm.


*Removable Bollard:* 500 x 500 x 300mm (hardcore for drainage is recommended under the socket before the concrete).

### Options Available:

- Range of sockets available.
- Reflective tape.
- Ram Raid.
- Other lengths available on request.
- Matches HC2088 cycle stand.

### Specifications:


Pipe (Dia)	114 mm
Wall Thickness	3 mm
Overground	900 mm
Underground	300 mm

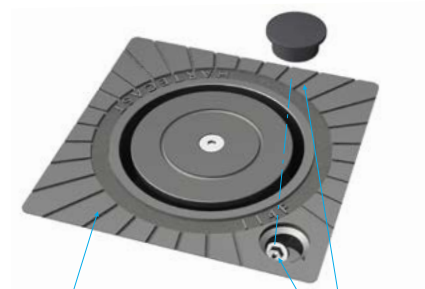

HC114F Ductile Iron Retention Socket



HC114R Stainless Steel Retention Socket

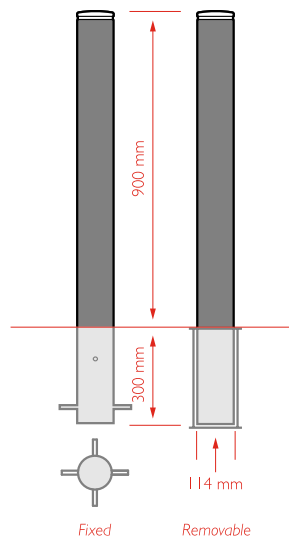

### HC2065 Bollard (Brushed Finish)