

HC2076 BOLLARD RANGE

HC2076 Bollard with Flat Top



HC2076 Bollard Product Specifications:

- Stainless steel bollard with flat top.
- Pipe is 114mm dia with a 4mm thickness.
- 900mm overground level and 300mm underground level.
- Powder coat finish, as we manufacture all our products in house we can arrange any colour combination you require, see our colour palette section.
- Fixed and removable versions with retention socket available.

Fitting: Fixed bollard is fixed underground level in concrete, removable bollard comes complete with retention socket.

Concrete Foundations:

Fixed Bollard: 500 x 500 x 300mm.



Removable Bollard: 500 x 500 x 300mm (hardcore for drainage is recommended under the socket before the concrete).

Options Available:

- Reflective tape.
- Other lengths available on request.

Specifications:

Pipe (Dia)	114 mm
Wall Thickness	4 mm
Overground	900 mm
Underground	300 mm

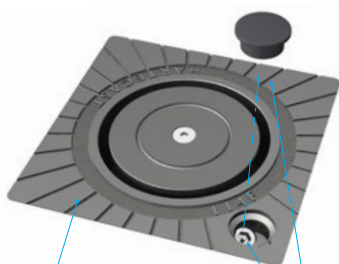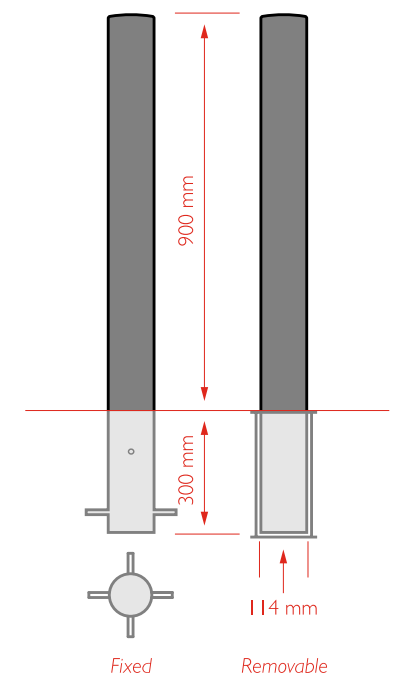

HC114F Ductile Iron Retention Socket



HC114R Stainless Steel Retention Socket