



HC2014C



HC2014DC

HC2014C & HC2014DC Bollard Product Specifications

- Square Stainless Steel bollard with cast stainless steel sloped square cap
- Square 100x100mm 4mm Wall Thickness
- 900mm Over Ground Level, 300mm Under Ground Level
- Powder coat finish as we manufacture all our products in house we can arrange any colour combination you require, see our colour palette section
- Fixed and Removable Versions Available
- Single collar ref HC2014C and double collar ref HC2014DC

Fitting:



Fixed bollard is fixed underground level in concrete, removable bollard comes complete with stainless steel flush retention socket

Concrete Foundations:

Fixed Bollard 500x500x300mm
 Removable Bollard 500x500x300mm
 (hardcore for drainage is recommended under the socket before the concrete)

Options Available:

- Other lengths available on request
- Square Stainless Steel lockable flush retention socket available
- Available with single collar ref HC2014C with contrasting colour top 50/100/150mm
- Available with double collar ref HC2014DC with double collar contrasting colour top 50/100/150mm

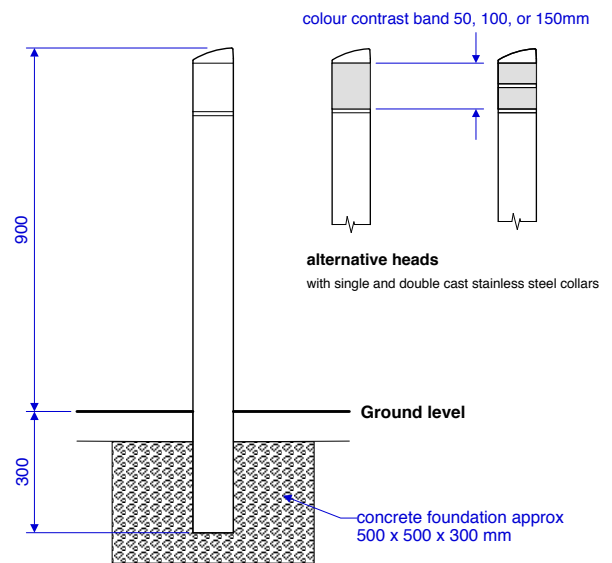

Specifications:

Pipe 100x100mm

Wall Thickness 4mm

Overground 900mm

Underground 300mm